


# 6" PRIMARY TIRE SHREDDER

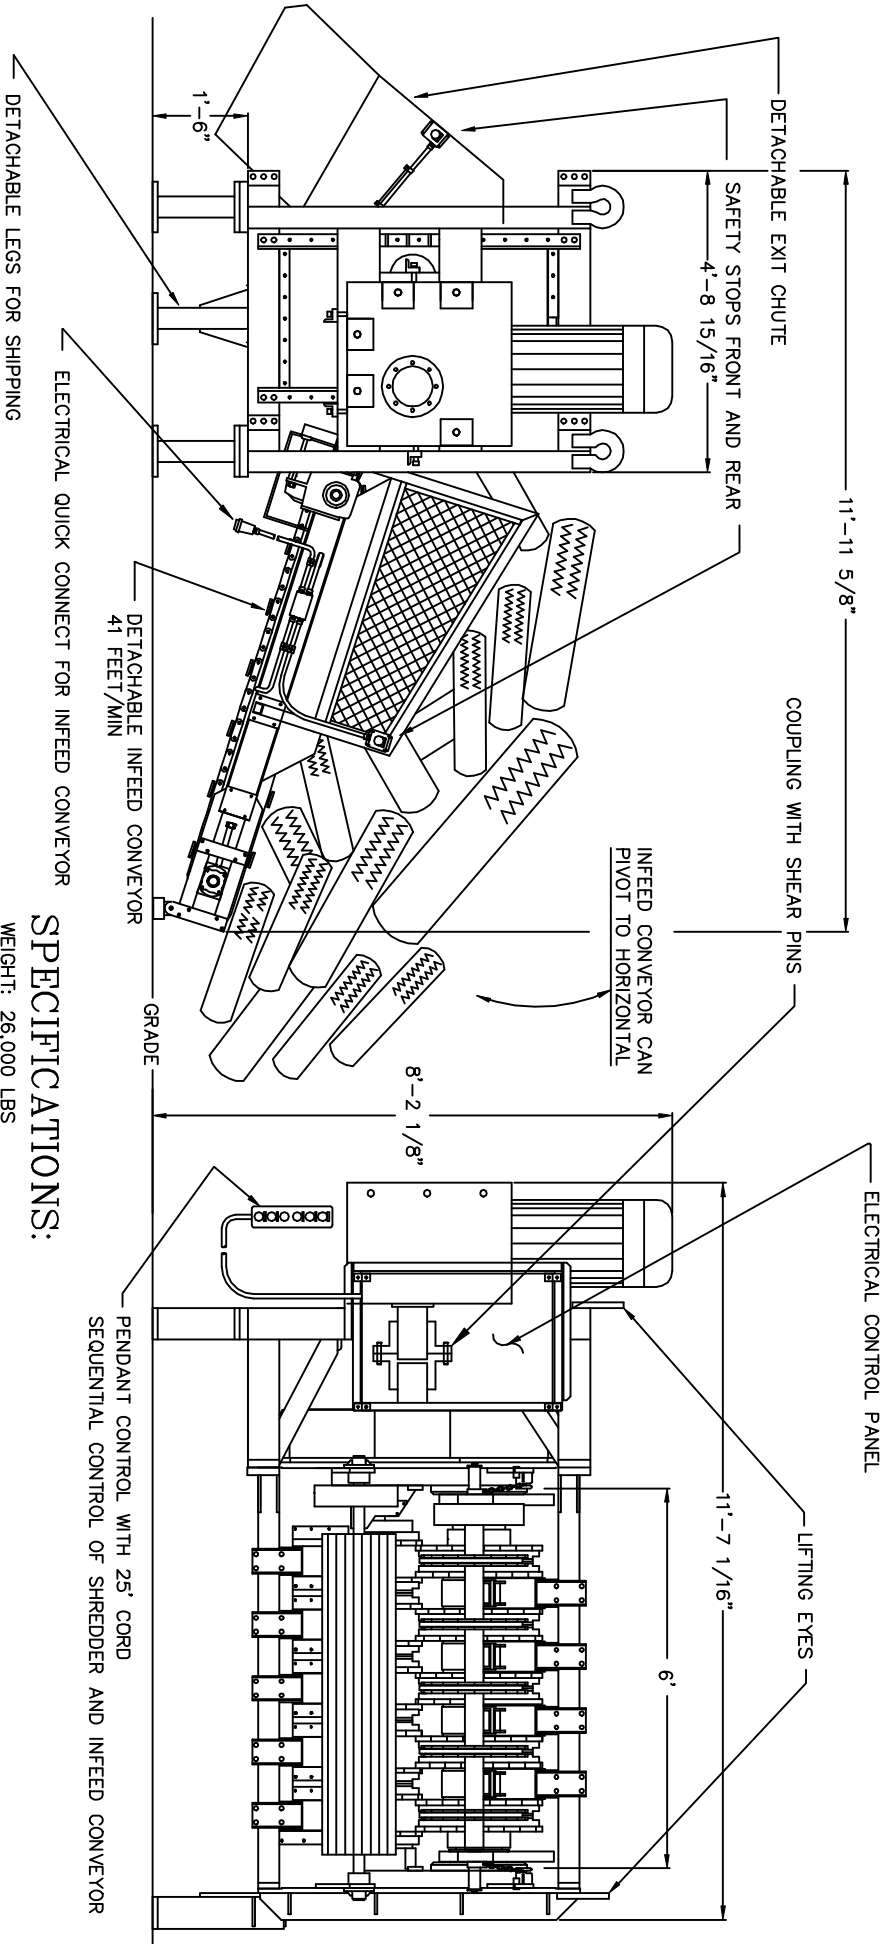

## SPECIFICATIONS:

WEIGHT: 26,000 LBS

GEARMOTOR: 50 HP, 480 V, 50 HZ, 3Ø, WITH BRAKE

SHAFT RPM: 6 RPM    SHAFT DIA: 9.50Ø    SHAFT ORIENTATION: VERTICAL

CONTROLS: FULLY WIRED TO ACCEPT LINE CONNECTION, REMOTE MOUNTED START/STOP/REVERSE/FEED START/FEED STOP CONTROL BOX.

SAFETY: EMERGENCY STOP BUTTONS MOUNTED ON FRONT AND BACK OF SHREDDER


CUTTER ROTORS: 10 PER SHAFT @ 6" SPACING    CUTTER BOX WIDTH: 72"

SIDE KNIFE: 12 PER ROTOR, 1" THICK AISI D-2 TOOL STEEL  
 SHARPENABLE WITH SHIMS TO .625" MIN. THICKNESS

STRIPPERS: FIXED WITH REPLACEABLE WEAR PLATES

THROUGHPUT: 320 TRUCK TIRES PER HOUR    > MIXED @ 16 TONS PER HOUR  
 1600 PASSENGER TIRES PER HOUR

MAXIMUM SHREDDING CAPACITY: NO TIRES THAT HAVE A SECTION THICKNESS, WHEN COMPRESSED, OF GREATER THAN 5 1/2"



**BARCLAY  
 ROTO-SHRED INC.**

3164 Loomis Road, Stockton, CA 95205  
 209-466-1209 Fax 209-465-2012

COVERED UNDER THE FOLLOWING PATENTS: 4,682,522; 4,776,249;  
 4,901,929; 4,976,178; 5,145,120